



ANTISKID RUBBER FLOORING



ZENITH™ INDUSTRIAL RUBBER
PRODUCTS PVT. LTD.
Quality Rubber Solutions

CONTENT

Introduction	01
Fine Rib Mat	02
Mini Fine Rib Mat	03
Flat Rib Mat	04
Broad Rib Mat	05
Wide Rib Mat	06
Truck Rib Mat	07
Transit Rib Mat	08
Diamond Design Mat	09
Square Stud Mat	10
Checkered Mat	11
Diamond Checkered Mat	12
Coin Mat	13
Ameoba Mat	14
Antiskid Gym Mat	15
Duraflor Rubber Flooring	16-17

INTRODUCTION

Zenith Industrial Rubber Products Private Limited, has been a leading manufacturer and exporter of high-quality industrial rubber sheeting products since its establishment in 1965. Over the years, Zenith has achieved remarkable success in the global market and has become recognized as a trusted supplier.

Zenith's dedication to quality and compliance is evident through its status as a government-recognized export house.

Supported by advanced infrastructure, Zenith boasts an impressive production capacity with 4 Intermix, 4 calendar, 30 Rotocure lines and 8 press lines. This infrastructure investment allows the company to meet the demands of the market effectively and efficiently.

With an installed **capacity of 90 Tons of rubber compound per day**, Zenith continues to strengthen its position in both domestic and international markets. Through its extensive experience, leadership, and dedication to quality, Zenith has earned a reputation as a reliable and trusted provider in the industrial rubber sheet manufacturing industry.

Zenith manufacture and exports a variety of Anti-Skid Mats for multipurpose applications. The primary objective of these mats is to provide a durable non-skid solution. Slippage has always been a problem in wet floors and surfaces, Our wide range of anti-skid mats are the best solution for it. Our mats are excellent in shock absorption, slip resistance and provide improved walking comforts. Flooring mats with anti-skid textures prevent slips & falls and come with a protective, non-stick finish to make cleaning quick and easy. These Mats are made and supplied in roll forms and are available in various polymers depending on their intended use.

Our quality and manufacturing procedures are strictly in accordance with **ISO 9001:2015, ISO 14001: 2015** and ZENITH's extensive R&D infrastructure plays a vital role in ensuring that the properties and technical parameters are well taken care off.




FINE RIB MAT



Zenith Rubber offers Fine Rib Mat which has an anti-slip ribbed surface one side and a fine cloth impression pattern on the other side. It is ideally suited for loose lay applications for floors, walkways, running tracks, loading areas, work-benches and general purpose areas. It solves slip hazards quickly in and around aprons, ramps and more. It can be glued directly over existing flooring in most cases or installed as a new floor. The rubber flutes act as a scraper to trap debris, dirt and provide grip at the same time. These mats are easily cleaned by reverse rolling or wiping.

STANDARD DIMENSION

MAXIMUM WIDTH :1.5 Meter
 LENGTH :10, 15, 20 Meter



TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
MRGP 65150	Black, Green, Red, Yellow, Blue	3	1.5	65+/-5	35	250	General Purpose	NR/SBR
MROR 70140	Black	3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
MRHT 60125	Black	5	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
MROU 65130	Black	3	1.3	65+/-5	80	250	Outdoor use	EPDM
MREI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
MREI-E 75150	Black, Grey	1.5	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
MRFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene
Available Colors								

- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request


MINI FINE RIB MAT



Zenith Rubber offers the Mini Fine Rib Mat as a more economical option compared to the Fine Rib Mat. While it shares similar features such as an anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side, the Mini Fine Rib Mat has a thinner profile. It is ideally suited for loose lay applications for floors, walkways, running tracks, loading areas, work-benches and general-purpose areas. It solves slip hazards quickly in and around aprons, ramps and more. It can be glued directly over existing flooring in most cases or installed as a new floor. The rubber flutes act as a scraper to trap debris, dirt and provide grip at the same time. These mats are easily cleaned by reverse rolling or wiping.

STANDARD DIMENSION

MAXIMUM WIDTH :1.5 Meter
 LENGTH :10, 15, 20 Meter



TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
MNGP 65150	Black, Green, Red, Yellow, Blue	3	1.5	65+/-5	35	250	General Purpose	NR/SBR
MNOR 70140	Black	3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
MNHT 60125	Black	5	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
MNOU 65130	Black	3	1.3	65+/-5	80	250	Outdoor use	EPDM
MNEI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
MNEI-E 75150	Black, Grey	3.5	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
MNFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene
Available Colors								

- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request


FLAT RIB MAT



Zenith Rubber offers Flat Rib Mat which has an anti-slip ribbed surface one side and a fine cloth impression pattern on the other side. The multipurpose Flat Rib Mat is widely used in and around entrance-ways, lifts, stairs, escalator aprons, ramps and many more. The flat Rib mat castellated rubber matting flutes act as a scraper to trap dirt and debris. Anti-Skid Properties makes it ideal to use indoor as well as outdoor applications and creates a sustainable environment. These mats are easily cleaned by reverse rolling or wiping.

STANDARD DIMENSION

MAXIMUM WIDTH :1.2 Meter
LENGTH :10, 15, 20 Meter

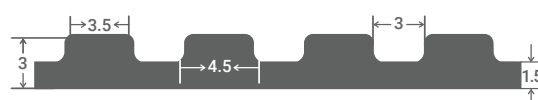

TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
LSGP 65150	Black, Green, Red, Yellow, Blue	3	1.5	65+/-5	35	250	General Purpose	NR/SBR
LSOR 70140	Black	3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
LSHT 60125	Black	5	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
LSOU 65130	Black	3	1.3	65+/-5	80	250	Outdoor use	EPDM
LSEI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
LSEI-E 75150	Black, Grey	3.5	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
LSFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene
Available Colors								

- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request

BROAD RIB MAT

Zenith Rubber offers Broad Rib Mat which has an anti-slip ribbed surface one side and a fine cloth impression pattern on the other side. Broad Rib Mat is known for its durability. This proves to be the perfect choice for most demanding resilience flooring conditions. This mat have a hardwearing and non-slip rib surface. They are ideal for use in walkways & minimize sound transmission. This rubber mat is textured, providing a secure gripping surface acting extra layer of safety and comfort, Available in various colours, these mats are perfect for both dry and wet areas and are simple to clean and require less maintenance.



STANDARD DIMENSION

MAXIMUM WIDTH :1.5 Meter
LENGTH :10, 15, 20 Meter



TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
CRGP 65150	Black, Green, Red, Yellow, Blue	3	1.5	65+/-5	35	250	General Purpose	NR/SBR
CROR 70140	Black	3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
CRHT 60125	Black	5	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
CROU 65130	Black	3	1.3	65+/-5	80	250	Outdoor use	EPDM
CREI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
CREI-E 75150	Black, Grey	3.5	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
CRFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene

Available Colors



- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request


WIDE RIB MAT

Zenith Rubber offers Wide Rib Mat which has an anti-slip ribbed surface one side and a fine cloth impression pattern on the other side. The Wide Rib Mat provides an excellent non-slip surface for optimum safety. This multipurpose mat is ideal for both wet & dry areas. With a variety of colours the mats enhance the interior design and provide great anti fatigue comfort. It is easy to clean with little maintenance.



STANDARD DIMENSION

MAXIMUM WIDTH :1.2 Meter
LENGTH :10, 15, 20 Meter




TECHNICAL SPECIFICATION								
Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
BRGP 65150	Black, Green, Red, Yellow, Blue	5,6	1.5	65+/-5	35	250	General Purpose	NR/SBR
BROR 70140	Black	5,6	1.4	70+/-5	50	300	Oil Resistant	Nitrile
BRHT 60125	Black	5,6	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
BROU 65130	Black	5,6	1.3	65+/-5	80	250	Outdoor use	EPDM
BREI-N 70155	Black, Grey	5,6	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
BREI-E 75150	Black, Grey	5,6	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
BRFR 70155	Black	5,6	1.55	70+/-5	50	250	Fire Resistant	Chloroprene
Available Colors								

- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request


TRUCK RIB MAT

Zenith Rubber offers Truck Rib Mat which has a Non-Skid ribbed surface one side and a fine cloth impression pattern on the other side. Truck Rib Mat provides a non-skid grip that helps to keep cargo in place and prevent damage to the truck beds from sliding cargo. It gives outstanding protection to the floor from damage when weights are dropped. The Truck Rib Mat has a superior grip surface with custom fit with easy installation and removal. It proves to be very effective for providing protection from dents and scratches.

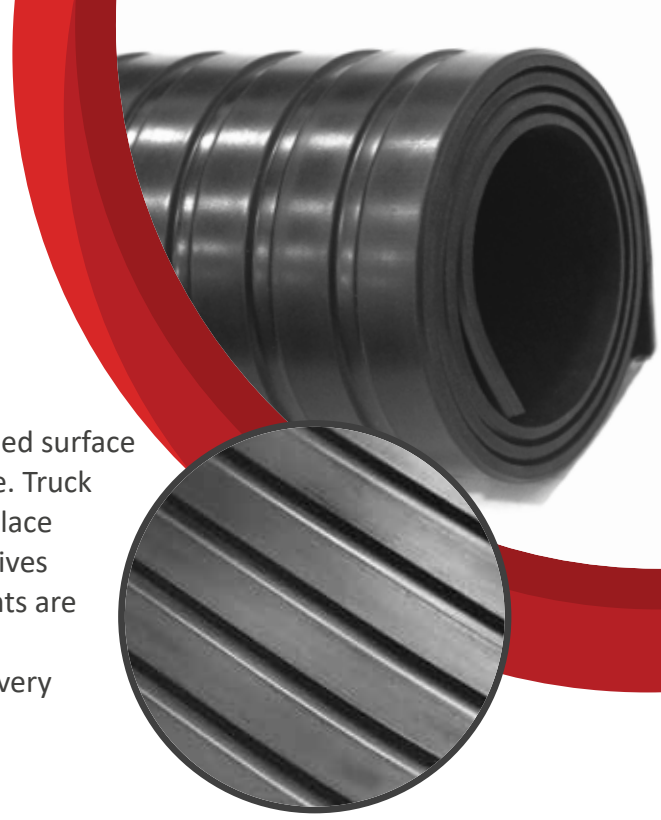

STANDARD DIMENSION

MAXIMUM WIDTH :2 Meter
 LENGTH :10, 15, 20 Meter

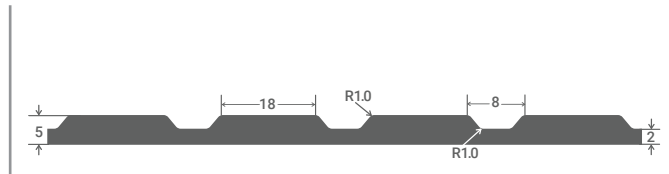


TECHNICAL SPECIFICATION								
Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
TLGP 65150	Black, Green, Red, Yellow, Blue	4.6, 6, 8, 10	1.5	65+/-5	35	250	General Purpose	NR/SBR
TLOR 70140	Black	4.6, 6, 8, 10	1.4	70+/-5	50	300	Oil Resistant	Nitrile
TLHT 60125	Black	4.6, 6, 8, 10	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
TLOU 65130	Black	4.6, 6, 8, 10	1.3	65+/-5	80	250	Outdoor use	EPDM
TLEI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
TLEI-E 75150	Black, Grey	4.6, 6, 8, 10	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
TLFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene
Available Colors								

- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request


TRANSIT RIB MAT

Zenith Rubber offers Transit Rib Mat which has a Non-Skid Double ribbed surface one side and a fine cloth impression pattern on the other side. Zenith rubber Transit flooring is heavy duty product with its acclaimed performance in school and commercial bus flooring application. Transit rib has great demand in high-traffic aisles and entrance areas. Zenith Rubber Transit flooring can be customised by providing marbling on the surface for enhancing the aesthetic appearance.

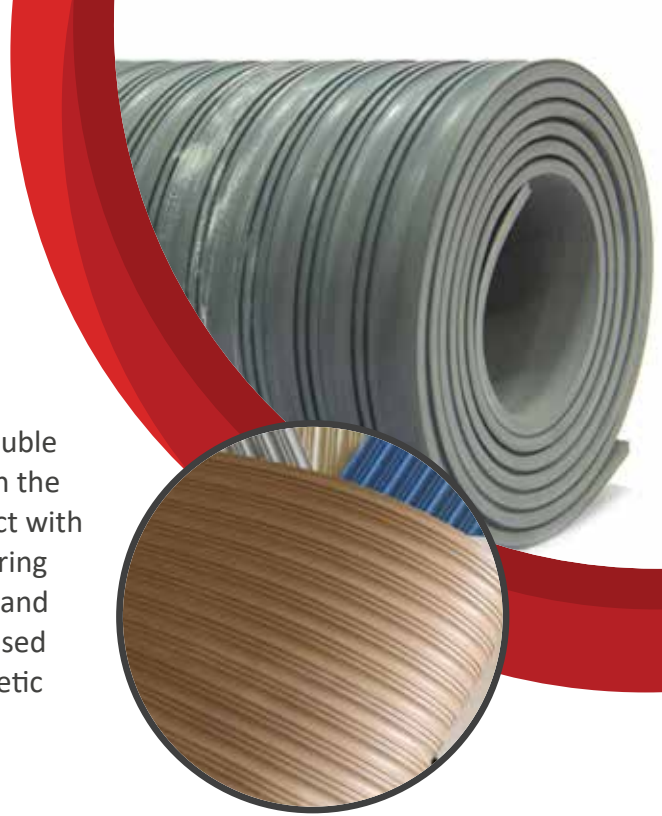

STANDARD DIMENSION

MAXIMUM WIDTH :1.4 Meter
LENGTH :10, 15, 20 Meter



TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
TRGP 65150	Black, Green, Red, Yellow, Blue	4.3	1.5	65+/-5	35	250	General Purpose	NR/SBR
TROR 70140	Black	4.3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
TRHT 60125	Black	4.3	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
TROU 65130	Black	4.3	1.3	65+/-5	80	250	Outdoor use	EPDM
TREI-N 70155	Black, Grey	4.3	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
TREI-E 75150	Black, Grey	4.3	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
TRFR 70155	Black	4.3	1.55	70+/-5	50	250	Fire Resistant	Chloroprene

Available Colors



- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request


DIAMOND DESIGN MAT



Zenith Rubber offers Diamond Design Mat which has a Non-Skid surface one side and a fine cloth impression pattern on the other side. The flooring with continuous diamond field design is for excellent traction. Non-staining, non-discolouring mat is used for both indoor and outdoor purpose. Diamond design is ideal for ramps, trailers, golf club bridge aprons, marine areas, building access points, wheeled vehicles, trolleys, etc. Being fully weather proof it can be used either indoors or outdoors. Diamond design matting is manufactured from top quality rubber compounds giving high non-tear qualities, offering exceptional wear and grip characteristics and surefootedness. These mats are easily cleaned by reverse rolling or wiping.

STANDARD DIMENSION

MAXIMUM WIDTH :1.2 Meter
 LENGTH :10, 15, 20 Meter

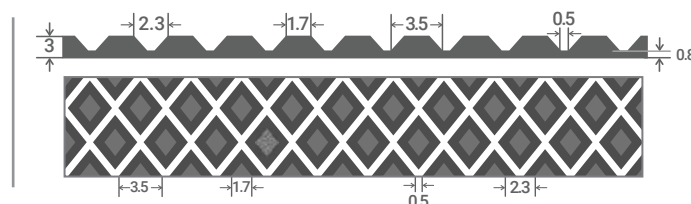

TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
DDGP 65150	Black, Green, Red, Yellow, Blue	3	1.5	65+/-5	35	250	General Purpose	NR/SBR
DDOR 70140	Black	3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
DDHT 60125	Black	5	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
DDOU 65130	Black	3	1.3	65+/-5	80	250	Outdoor use	EPDM
DDEI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
DDEI-E 75150	Black, Grey	3.5	1.5	75 +/--5	60	250	Electrical Insulation	EPDM
DDFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene
Available Colors								

- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request


SQUARE STUD MAT

Zenith Rubber offers Square Design Mat which has a Non-Skid surface one side and a fine cloth impression pattern on the other side. Square design mat has a high relief design surface and offers excellent anti-slip characteristics from any direction of approach. The square design mat can be stuck directly over existing hard flooring in most cases and also ideally suited for loose lay application for walkways, runners and general purpose industrial and commercial flooring areas. These mats are easily cleaned by reverse rolling or wiping.



STANDARD DIMENSION

MAXIMUM WIDTH :1.2 Meter
 LENGTH :10, 15, 20 Meter

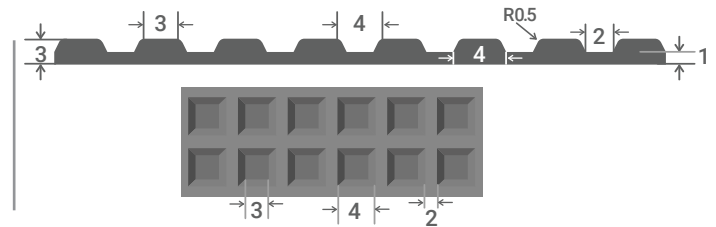

TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
SDGP 65150	Black, Green, Red, Yellow, Blue	3	1.5	65+/-5	35	250	General Purpose	NR/SBR
SDOR 70140	Black	3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
SDHT 60125	Black	5	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
SDOU 65130	Black	3	1.3	65+/-5	80	250	Outdoor use	EPDM
SDEI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
SDEI-E 75150	Black, Grey	3.5	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
SDFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene

Available Colors 

Note : 1. Custom width and length is available on request
 2. Custom colours available on request


CHECKERED MAT



Zenith Rubber offers Checkered Design mat which has a Non-Skid surface one side and a fine cloth impression pattern on the other side. The flooring with continuous checkered field pattern is designed for excellent traction and easy cleaning. Non-staining, non-discoloring mat is used for both indoor and outdoor purpose. Checkered mat pattern is ideal for ramps, trailers, golf club bridge aprons, marine areas, building access points, wheeled vehicles, trolleys, etc. Being fully weather proof, it can be used either indoors or outdoors. Checkered pattern matting is manufactured from top quality rubber compounds which give high non-tear qualities, offering exceptional wear and grip characteristics. These mats are easily cleaned by reverse rolling or wiping.

STANDARD DIMENSION

MAXIMUM WIDTH :1.6 Meter
 LENGTH :10, 15, 20 Meter

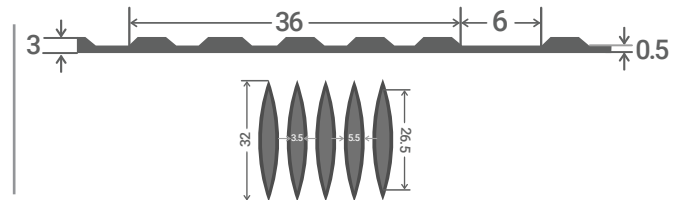

TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
CDGP 65150	Black, Green, Red, Yellow, Blue	3	1.5	65+/-5	35	250	General Purpose	NR/SBR
CDOR 70140	Black	3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
CDHT 60125	Black	5	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
CDOU 65130	Black	3	1.3	65+/-5	80	250	Outdoor use	EPDM
CDEI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
CDEI-E 75150	Black, Grey	3.5	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
CDFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene
Available Colors								

- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request


DIAMOND CHECKERED MAT

Zenith Rubber offers Diamond Checkered Design Mat which has a Non-Skid surface one side and a fine cloth impression pattern on the other side. The flooring with continuous Checkered field pattern is designed for excellent traction and easy cleaning. Non-staining, non-discolouring mat is used for both indoor and outdoor purpose. Diamond Checkered mat pattern is ideal for ramps, trailers, golf club bridge aprons, marine areas, building access points, wheeled vehicles, trolleys, etc. Being fully weather proof, it can be used either indoors or outdoors. Diamond Checkered pattern matting is manufactured from top quality rubber compounds which give high non-tear qualities, offering exceptional wear and grip characteristics. These mats are easily cleaned by reverse rolling or wiping.



STANDARD DIMENSION

MAXIMUM WIDTH : 2 Meter
 LENGTH : 10, 15, 20 Meter

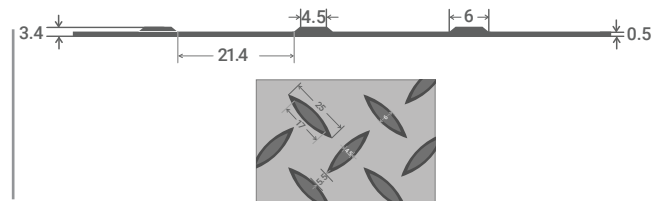


TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
DCGP 65150	Black, Green, Red, Yellow, Blue	3	1.5	65+/-5	35	250	General Purpose	NR/SBR
DCOR 70140	Black	3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
DCHT 60125	Black	5	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
DCOU 65130	Black	3	1.3	65+/-5	80	250	Outdoor use	EPDM
DCEI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
DCEI-E 75150	Black, Grey	3.5	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
DCFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene
Available Colors								

- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request


COIN MAT

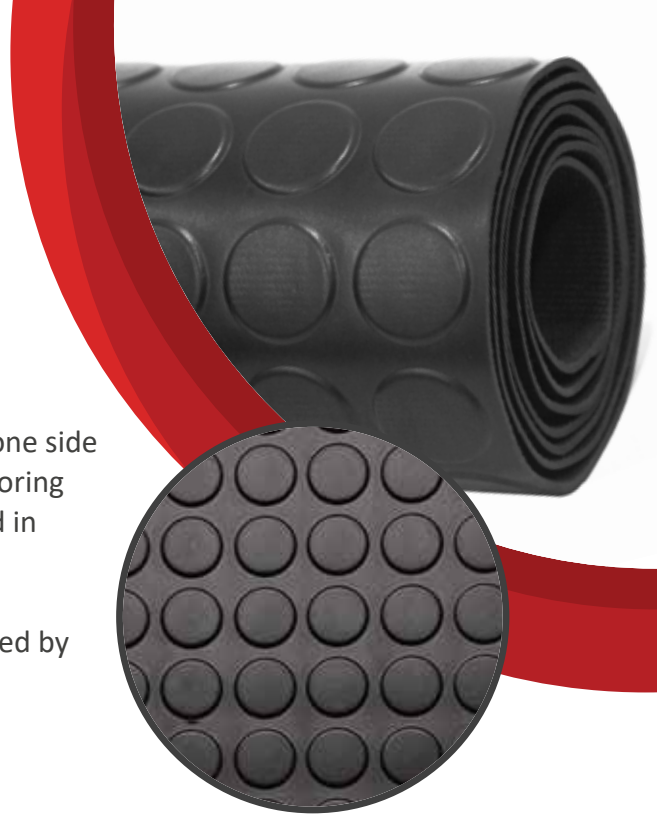

Zenith Rubber offers Coin Mat which has a Non-Skid surface one side and a fine cloth impression pattern on the other side. This flooring mat with a raised circular design on the surface is widely used in indoor application such as airport, hotels, shopping malls etc. Available in wide variety of colours and various compounds depending on their indented use. These mats are easily cleaned by reverse rolling or wiping.

STANDARD DIMENSION

MAXIMUM WIDTH :1.5 Meter
LENGTH :10, 15, 20 Meter

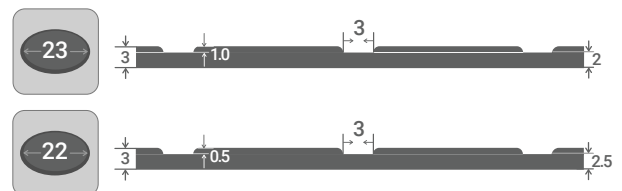

TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
CSGP 80160	Black, Green, Red, Yellow, Blue	3	1.6	80+/-5 / 65+/-5	35	250	General Purpose	NR/SBR
CSOR 70140	Black	3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
CSHT 60125	Black	5	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
CSOU 65130	Black	3	1.3	65+/-5	80	250	Outdoor use	EPDM
CSEI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
CSEI-E 75150	Black, Grey	3.5	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
CSFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene

Available Colors



- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request

AMEOBA MAT

Zenith Rubber offers Amoeba Mat which has a Non-Skid surface one side and a fine cloth impression pattern on the other side. The multi-purpose amoeba mat is widely used in and around entrance ways, lift doors, stair, escalator, ramps and more. The amoeba mat castellated rubber matting flutes, act as a scraper to trap dirt and debris. Anti-Skid Property makes it ideal to use indoor as well as outdoor and creates sustainable environment. These mats are easily cleaned by reverse rolling or wiping.



STANDARD DIMENSION

MAXIMUM WIDTH :1.6 Meter
LENGTH :10, 15, 20 Meter


TECHNICAL SPECIFICATION

Code	Colour	Thickness	Specific Gravity	Hardness	Tensile Strength	Elongation	Application	Polymer
		mm	Gm/cm ³	Shore A	Kg/cm ² (min)	% (min)		
AMGP 65150	Black, Green, Red, Yellow, Blue	3	1.5	65+/-5	35	250	General Purpose	NR/SBR
AMOR 70140	Black	3	1.4	70+/-5	50	300	Oil Resistant	Nitrile
AMHT 60125	Black	5	1.25	60+/-5	125	350	High Traffic areas	NR/SBR
AMOU 65130	Black	3	1.3	65+/-5	80	250	Outdoor use	EPDM
AMEI-N 70155	Black, Grey	3/4/5	1.55	70+/-5	50	250	Electrical Insulation	NR/SBR
AMEI-E 75150	Black, Grey	3.5	1.5	75 +/-5	60	250	Electrical Insulation	EPDM
AMFR 70155	Black	3/4/5	1.55	70+/-5	50	250	Fire Resistant	Chloroprene
Available Colors								

- Note :**
1. Custom width and length is available on request
 2. Custom colours available on request

ANTISKID GYM MAT

Zenith Rubber crumb Tiles, also known as rubber granule tiles is a type of Flooring material made from recycled rubber. It is commonly used in various settings due to its durability, slip resistance, and shock-absorbing. The rubber particles are bound together using a polyurethane or epoxy resin binder. Rubber crumb flooring is highly durable and can withstand heavy foot traffic, making it suitable for both residential and commercial applications. Rubber Crumb is ideal for running tracks, synthetic playing surfaces, playground surfaces, Gyms and Fitness centres.

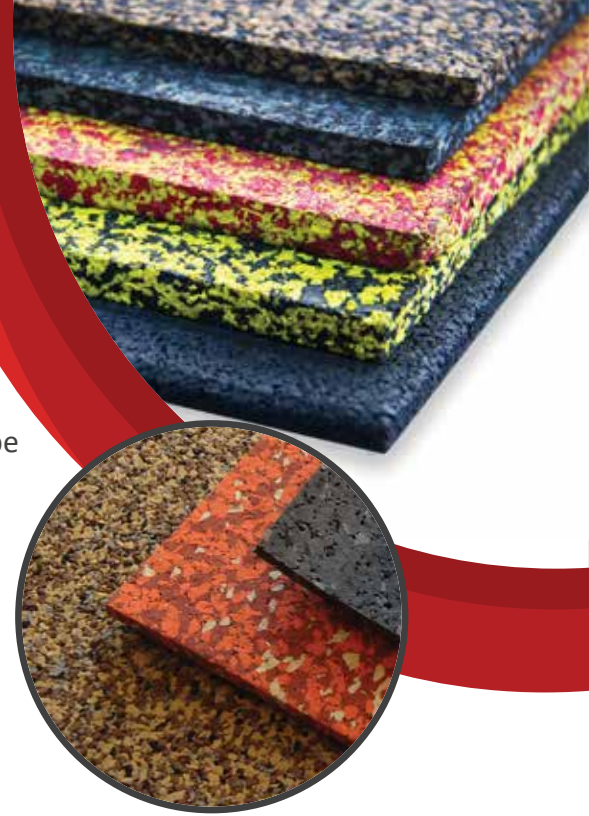

STANDARD DIMENSION

SIZE :500 x 500
THICKNESS :10mm to 25mm
DESIGN :PLAIN / INTERLOCKING

PRODUCT USP

- Available in different shades and sizes
- Durable and Long lasting
- Sustains heavy weight
- Soft and comfortable walking experience
- Easy installation

PRODUCT FEATURES

- Rubber Tiles are suitable for areas that require under-foot safety or a visually textured surface.
- Tough rubber flooring made up of 80% black recycled rubber & 20% color, EPDM (Ethylene-Propylene Diene-Manomer rubber) granules.
- Easy to remove & replace or re-install.
- Quick renewal of floor surface. Withstand heavy load. Ultra-durable & resilient. Easy to clean, mop or sweep.
- Environment friendly recycled product





RUBBER FLOORING


Duraflor® rubber flooring's offers excellent resilience, endurance and dimensional stability thus making it the obvious choice for all of your flooring needs. With Zenith's R&D facilities continually refining its manufacturing process, you are assured to get a high quality product that will serve you for years to come.

Duraflor® provides maximum underfoot comfort with a high aesthetic appeal. It is more comfortable to walk on than other hard surface flooring. Duraflor® products also minimize the noise created by footsteps and wheeled traffic.

Duraflor® rubber flooring is highly slip retardant and can mitigate the risks of slips and falls in high traffic areas. It is recommended for floor coverings in areas such as metros, trains and buses. Due to its soft rubber base it acts like anti-fatigue flooring, making it the ideal choice also for school, hospitals and gymnasiums, shopping malls.

Duraflor® rubber flooring specially designed to protect floor surface & can be either loosely laid or bonded to the floor. Duraflor® rubber flooring offers an exciting contemporary look. Our speckle collection with more than 25 colours is suitable for schools & hotel lobby corridor, lifts, shops & commercial complex. Duraflor® rubber flooring saves your money as maintenance cost is very less compared to most of the other flooring with hard surface floorings and carpets. It is scratch resistant and can be cleaned easily with widely available cleaners. There is no need for waxing, polishing, scrubbing, sanding or refinishing. Duraflor® gives luxurious look to your flooring and has exceptional sound proofing qualities that make it specially suitable for cooperative buildings, hotel rooms.

Duraflor® is available in a wide range of colors and designs to make sure that your surroundings look just the way you want them. We also give our customers the options of ordering custom colors thereby providing them with the opportunity of total satisfaction. Duraflor® rubber flooring with proper choice of colors will give realistic wood look with benefits of a synthetic floor, hygienic, antibacterial properties. Duraflor® flooring range includes innovative rubber flooring supplied in either tiles or rolls. Duraflor® flooring range offers many varieties of colors in Solids, Marbles & Speckle designs with smooth or sanding backing as per requirement of customer. You can match combination of colors in speckles design as per your interior demand. Match your flooring design with your walls & furniture colors it will give a classic look to your home as well as office. Duraflor® Rubber Floorings provides quality rubber solutions to satisfy customers needs worldwide.

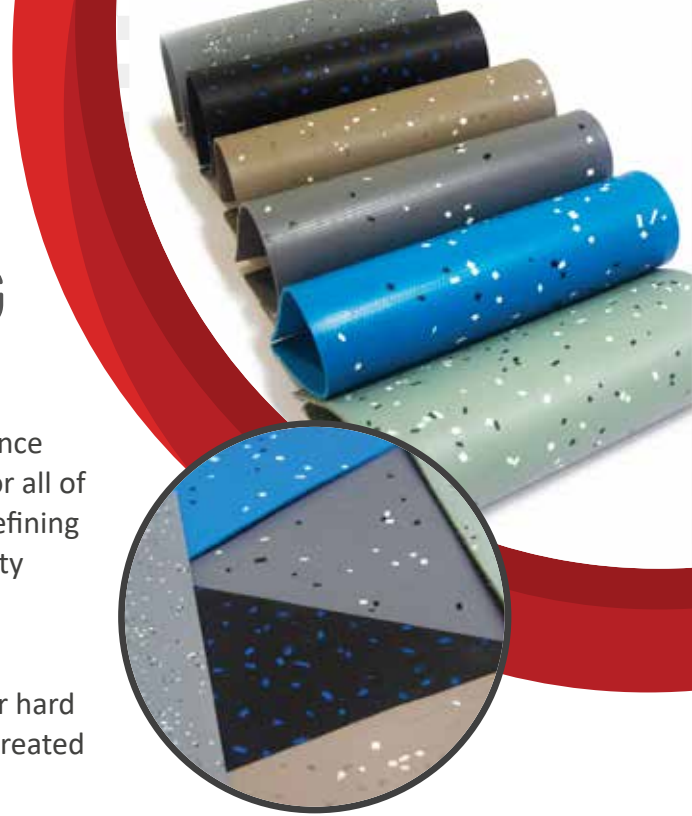


PRODUCT DIMENSIONS

Code	Thickness (mm)	Width (meter)	Length (meter)
Duraflor Marbles	2 mm to 4.5 mm	1/1.2/1.4/1.5/1.8/2	10 to 30
Duraflor Speckles	2 mm to 4.5 mm	1/1.2/1.4/1.5/1.8/2	10 to 30
Duraflor Solids	2 mm to 4.5 mm	1/1.2/1.4/1.5/1.8/2	10 to 30

RUBBER FLOORING

Solid

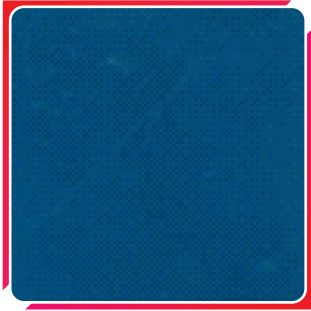

DT-PL-001
Royal Blue



DT-PL-002
Sea Green



DT-PL-005
Black

Marble



DT-MB-014
Tan




DT-MB-022
Maroon




DT-MB-012
Walnut


Speckles

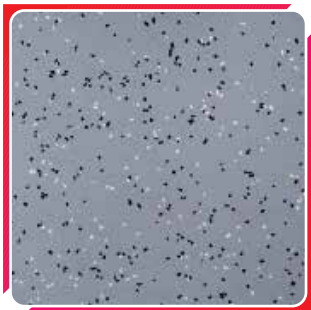

DT SP CL-0-004
Dark Grey

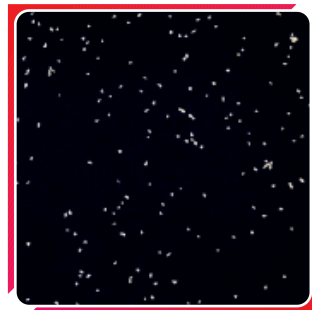

DT SP CL-0-005
Black

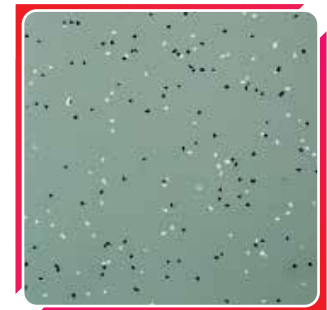

DT SP CL-0-005
Light Green

Zenith Rubber enjoys the leadership status
with their wide Presence & Network
across the globe



ZENITH™ **ZENITH** INDUSTRIAL RUBBER
PRODUCTS PVT. LTD.
Quality Rubber Solutions



www.zenithrubber.com

141-144, Free Press House, Free Press Journal Marg 215,
Nariman Point, Mumbai - 400 021

Contact No : +91-22 22885888 / 31001400 | Fax : 91-22 22885222

Email: info@zenithrubber.com (International) | sales@zenithrubber.com (Domestic)

